



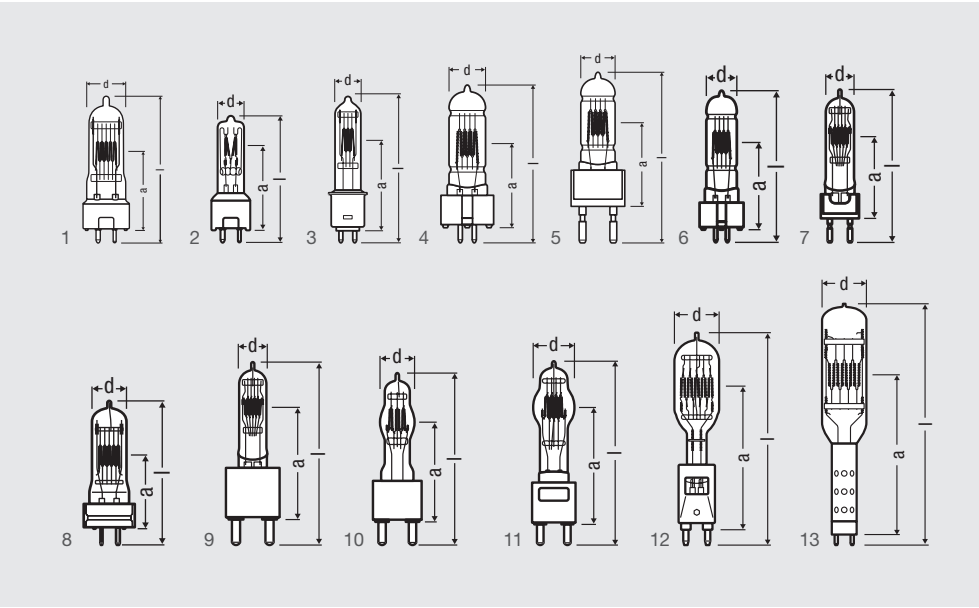

Halogen studio lamps

Product reference	Product number															
64673	4052899015463	FSL	CP/81	300	230	200	7500	3100	18	80	46.5	6.5*13	Any	GY9.5	12	2
64673	4052899015487	FSK	CP/81	300	240	200	7500	3100	18	80	46.5	6.5*13	Any	GY9.5	12	2
64670	4008321624017	GCV	T/25	500	230	300	11000	3000	23	90	46.5	11.0*11.0	s90	GY9.5	12	1
64670	4008321624031	GCV	T/25	500	240	300	11000	3000	23	90	46.5	11.0*11.0	s90	GY9.5	12	1
64674	4052899015500	FRH	CP/82	500	230	200	13500	3200	18	80	46.5	8.0*18	Any	GY9.5	12	2
64674	4052899015524	FRJ	CP/82	500	240	200	13500	3200	18	80	46.5	8.0*18	Any	GY9.5	12	2
64680	4008321098573		A1/244	500	230	50	14500	3200	22	75	36.5	10.0*10.0 ¹⁾	Any	GY9.5	12	1
64680	4008321098597		A1/244	500	240	50	14500	3200	22	75	36.5	10.0*10.0 ¹⁾	Any	GY9.5	12	1
64716	4008321623973	GKV		600	230	250	14000	3050	19	101	60.5	9.0*13.0	s90	G9.5	12	3
64716	4008321623997	GKV		600	240	250	14000	3050	19	101	60.5	9.0*13.0	s90	G9.5	12	3
64717	4008321624215	FRL	CP/89	650	230	150	16250	3200	23	90	46.5	26.0*33.0	s90	GY9.5	12	1
64717	4008321624239	FRM	CP/89	650	240	150	16250	3200	23	90	46.5	26.0*33.0	s90	GY9.5	12	1
64718	4008321624253	GCT	T/27	650	230	400	14500	3000	23	90	46.5	10.0*10.0	s90	GY9.5	12	1
64718	4008321624277	GCT	T/27	650	240	400	14500	3000	23	90	46.5	10.0*10.0	s90	GY9.5	12	1
64719	4008321638076		T/12	650	230	750	12000	3000	26	110	55	13.0*11.0	s90	GX9.5	20	4
64720	4008321638090		CP/23	650	230	100	16800	3200	26	110	55	13.0*17.0 ¹⁾	s90	GX9.5	20	4
64721	4008321638113	FKH	CP/39	650	230	100	16800	3200	26	140	63.5	13.0*17.0 ¹⁾	s90	G22	20	5
64678	4008321624055			800	230	250	20000	3200	19	101	60.5	9.0*13.0	s90	G9.5	12	3
64752	4008321624475	FWS	T/29	1200	230	400	28600	3000	27	125	67	13.0*15.0	s90	GX9.5	20	6
64752	4008321624499	FWS	T/29	1200	240	400	28600	3000	27	125	67	13.0*15.0	s90	GX9.5	20	6
64754	4008321624529		CP/90	1200	230	200	30000	3200	27	125	67	13.0*15.0	s90	GX9.5	20	6
64756	4008321624550		CP/93	1200	230	200	30000	3200	26	140	63.5	13.0*15.0	s90	G22	20	5
93723	4008321370594		CP/110	1200	80	300	37500	3200	22	120.7	63.5	12.7*12.7	s135	2 pins	12	7
64777	4008321632197		CP/92	2000	230	400	52000	3200	35	175	90	20.0*19.0	s90	G22	12	7
64787	4008321653994		CP/75	2000	230	400	52000	3200	35	160	75	20.0*19.0	s90	G22	12	7
64788	4008321632173	FTM	CP/72	2000	230	400	52000	3200	35	145	70	20.0*19.0	s90	GY16	12	8
64788	4008321632180	FTM	CP/72	2000	240	400	52000	3200	35	145	70	20.0*19.0	s90	GY16	12	8
64789	4008321654021	FKK	CP/73	2000	230	400	52000	3200	35	210	127	20.0*19.0	s90	G38	6	9
64789	4008321654038	FKK	CP/73	2000	240	400	52000	3200	35	210	127	20.0*19.0	s90	G38	6	9
64796	4008321653987		CP/91	2500	230	400	65000	3200	35	175	90	20.0*19.0	s90	G22	12	7
64797	4052899129542			3000	230	400	82000	3200	45	210	127	33.0*35.0	s90	G38	6	10
64805	4052899129580		CP/85	5000	120	400	135000	3200	60	279.4	165	26.0*33.0	s90	G38	6	11
64805	4052899129566		CP/85	5000	230	400	135000	3200	60	279	165	26.0*33.0	s90	G38	6	11
64805	4052899129573		CP/85	5000	240	400	135000	3200	61	279	165	26.0*33.0	s90	G38	6	11
64815	4050300780696	ECR	CP/83	10000	230	350	285000	3200	80	400	254	60.0*35.0	s45	G38	6	12
64818	4008321792051	BCM	CP/99	20000	230	350	580000	3200	100	550	354	67.0*50.0	s45	G38	4	13

1) With monoplane filament

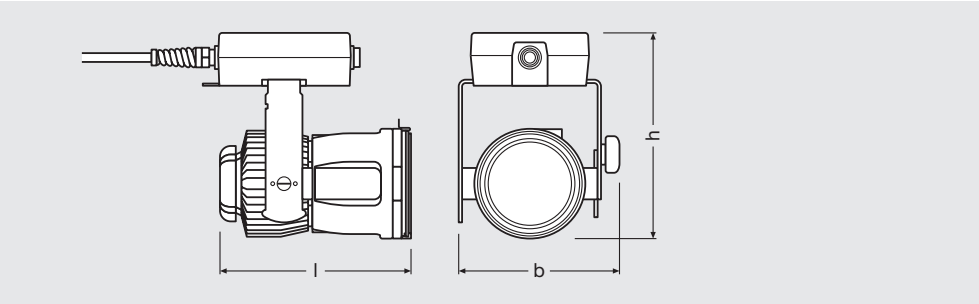


KREIOS® SL

Product reference	Product number	W	V		R _a	K	lm	t[h]					CE	UL
KREIOS® SL	4052899000001	60	120	24/40-120	≥95	3.200	3.000	30.000 ¹⁾	178	154	202	1.900	no	yes
KREIOS® SL	4008321843951	60	220-240	24/40-120	≥95	3.200	3.000	30.000 ¹⁾	178	154	202	1.900	yes	no

1) Lumen Maintenance L70 @25°C

Mounting Bracket with clearance hole to accept 13mm/1/2" bolts for truss mounting. Threaded hole (1/2"-13 UNC) at fixture accepts direct mounting to clamps and other mounts. Items in packaging include barn doors, gel frame holder, 24° spot reflector, replacement zoom adjust ring in black color, zoom lock accessory, tripod adapter.

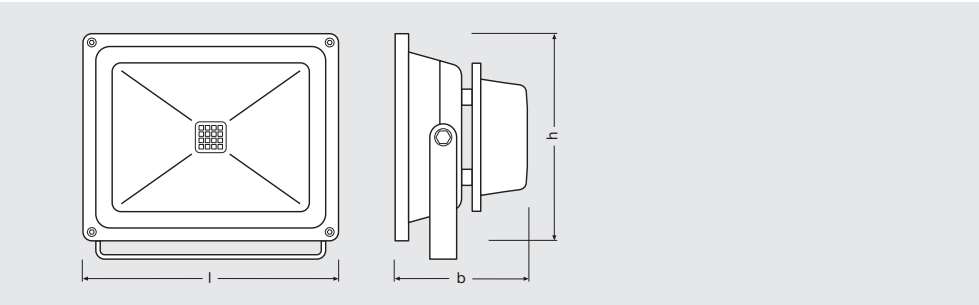

KREIOS® FL

Product reference	Product number	W	V	R _a	K	lm	t[h]					CE	UL
KREIOS® FL	4052899193178	60	100-240	≥95	3.200	3.000	30.000 ¹⁾	285	160	235	4.000	yes	no
KREIOS® FL	4052899193192	60	100-240	≥95	3.200	3.000	30.000 ¹⁾	285	160	235	4.000	no	yes
KREIOS® FLX	4052899193154	90	120	≥95	3.200	5.000	30.000 ¹⁾	285	160	235	4.600	no	yes
KREIOS® FL/FLX GEL FRAME	4052899201361	-	-	-	-	-	-	293	15	239	166	-	-

1) Lumen Maintenance L70 @25°C

Safety: To prevent personal injury or damage to property, halogen lamps may be operated in suitable luminaires designed with mechanisms (protective shields, grids etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that no ultraviolet radiation can escape during operation. The lamps emanate intense heat.