

Technical Information

No. FO 4229

Edition: 04/00 - subject to change

Supersedes 03/98

Status: valid

Tungsten Halogen Lamp for Airfield Lighting

64317

General description

- Tungsten halogen lamp
- Series operation with max. 6.6 A
- Long-life
- Cement-free base
- Cables with male connectors (ISO 8092-1)


Technical data

Electrical data

Rated lamp wattage	W	45
Maximum initial wattage	W	51.5
Maximum operation current	A	6.6

Performance data (at 6.6 A)

Rated luminous flux	lm	800
Minimum initial luminous flux	lm	720
Average life	h	1000
Luminous flux after 750 h	lm	min. 90% of initial

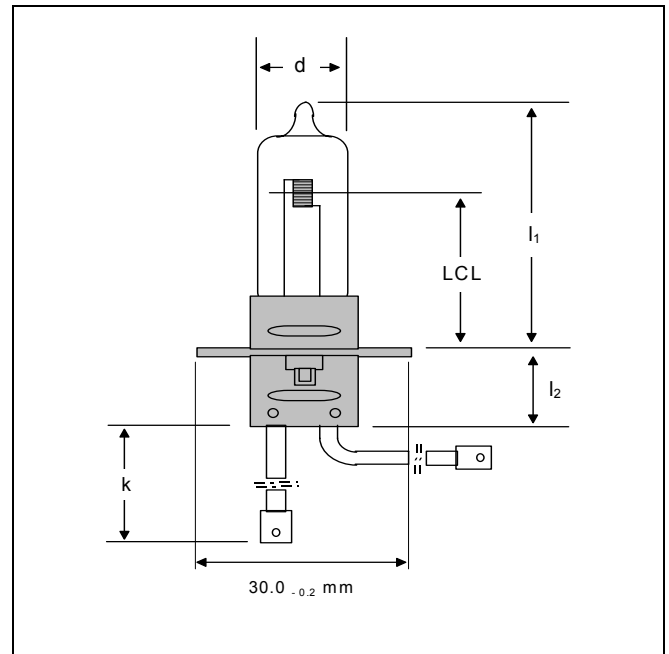

Internal dimensions

Filament type		C-8
Filament diameter	mm	approx. 1.4
Filament height	mm	approx. 3.6
LCL	mm	16.0 ± 0.5
Deviation of filament centre	mm	max. 1.0 (refers to base axis)

External dimensions

Height l ₁	mm	max. 37
Height l ₂	mm	max. 21
Cable length k	mm	min. 115
Bulb diameter d	mm	max. 13.5

Base and connector

Base	PK30d
Connector	male, tab ISO 8092-1 6.3 x 0.8 0H

Operation conditions

Burning position	s90, vertical to horizontal, base down
Maximum pinch temperature	°C 350
Maximum ambient temperature	°C 200

Compliance with international standards

Chromaticity	within white boundaries as defined in Annex 14 to the Convention of International Civil Aviation
--------------	--

