



IP66

IK08



IEC
60598



40°C
-20°C

RU



VS LIGHTING SOLUTIONS

Тип	Световой поток (лм)	Напряжение питания переменным током (В)	Частота сети питания (Гц)	Мощность (Вт)	Размеры (мм)	Класс энерго-эффективности источника света	Вес (кг)
WP-C-600-23-840/WP-C-600-23-865	3000	220 - 240	50 / 60	23	593×65,2×55,2	D	0,30
WP-C-1200-46-840/WP-C-1200-46-865	6000	220 - 240	50 / 60	46	1183×65,2×55,2	D	0,52
WP-C-1500-53-840/WP-C-1500-53-865	7000	220 - 240	50 / 60	53	1483×65,2×55,2	D	0,65
WP-C-600-23-840-T/WP-C-600-23-865-T	3000	220 - 240	50 / 60	23	638×65,2×55,2	D	0,34
WP-C-1200-46-840-T/WP-C-1200-46-865-T	6000	220 - 240	50 / 60	46	1228×65,2×55,2	D	0,57
WP-C-1500-53-840-T/WP-C-1500-53-865-T	7000	220 - 240	50 / 60	53	1528×65,2×55,2	D	0,72


Размер (мм)	L600	L1200	L1500
A	100 - 140	200 - 240	300 - 340
B	82	82	82
C	550	1140	1440

Установка светильника

- ✓ Установка на потолок
- ✓ Установка на стену (горизонтально)
- ✓ Установка на подвеску

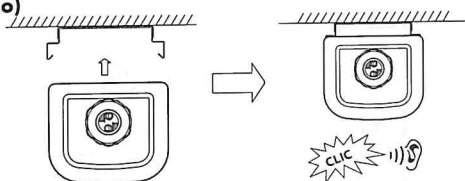



Установка на опорную поверхность




Подвесной монтаж



Присоединение кабеля

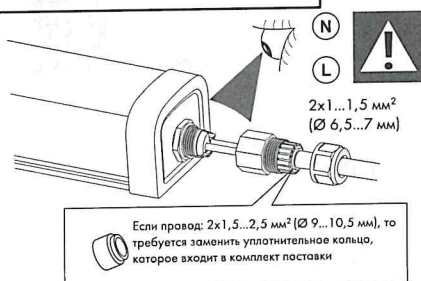

Пусковой ток



	L600	L1200	L1500
Max (A)	5,6	26,8	34,0
Tref (µs)	47	320	320
B-16A	90	12	9
C-16A	90	20	17