

Low-loss Ballasts 5–65 W, 230 V

**For compact fluorescent lamps
and fluorescent lamps**
Shape: 28x41 mm

Vacuum-impregnated with polyester resin



Push-in terminal for leads: 0.5–1 mm²

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

tw 130

Protection class I

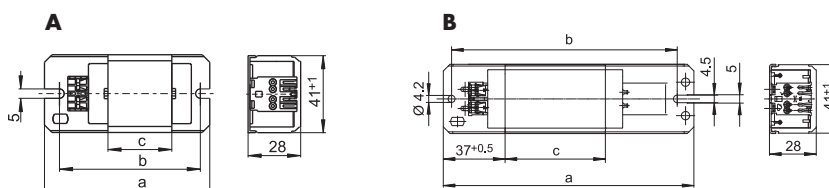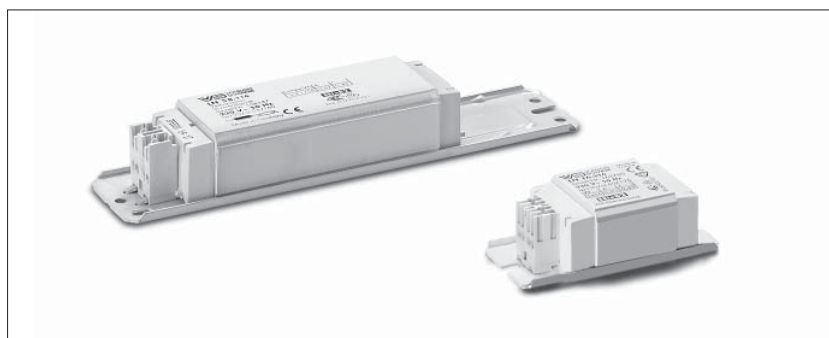

Low-loss ballasts for compact fluorescent lamps

Lamp				Ballast										Capacitor		Packaging
Output	Type	Base	Current	Type	Ref. No.	V, Hz	Draw- ing	a	b	c	Weight	$\Delta t/\Delta t_{an}$	EEI*	C _p	Current	unit
W			mA					mm	mm	mm	kg	K		μF	mA	Pieces per box/pallet
5/7/ 9/11	TC-S	G23	180/ 175/ 170/155	L 7/9/11.307*	163694	230, 50	A	85	75	34	0.32	60/85	B2	2.0	50	10/2250
2x5/ 7/9	TC-S	G23	180/ 160/140	LN 13.313*	163711	230, 50	A	85	75	34	0.32	55/80	B2	2.0	70	10/2250
10	TC-D	G24d-1	190	LN 13.313*	163711	230, 50	A	85	75	34	0.32	55/80	B2	2.0	70	10/2250
	TC-DD	GR10q	180													
13	TC-D/ TC-T	G24d-1/ GX24d-1	175	LN 13.313*	163711	230, 50	A	85	75	34	0.32	55/80	B2	2.0	80	10/2250
16	TC-DD	GR8/ GR10q	195	LN 16.316*	163730	230, 50	A	85	75	34	0.32	60/125	B1	2.0	100	10/2250
18	TC-D/ TC-T	G24d-2/ GX24d-2	220	LN 18.319*	163763	230, 50	B	85	75	34	0.32	60/140	B1	2.0	110	10/2250
26	TC-D/ TC-T	G24d-3/ GX24d-3	325	LN 26.813*	509502	230, 50	B	110	100	45	0.41	55/145	B2	3.5	140	10/2100

* Energy efficiency: Ballasts without CE marking for replacements or markets outside of the EU

Low-loss ballasts for fluorescent lamps

Lamp				Ballast										Capacitor		Packaging
Output	Type	Base	Current	Type	Ref. No.	V, Hz	Draw- ing	a	b	c	Weight	$\Delta t/\Delta t_{an}$	EEI*	C _p	Current	unit
W			mA					mm	mm	mm	kg	K		μF	mA	Pieces per box/pallet
18/20	T8 (T26)	G13	370	LN 18.114*	508183	230, 50	B	150	140	60	0.55	55/90	B2	4.5	120	10/1500
30	T8 (T26)	G13	365	LN 30.801*	169645	230, 50	B	150	140	60	0.55	55/110	B2	4.5	180	10/1500
36/40	T8 (T26)/T12 (T38)	G13	430	LN 36.149*	529029	230, 50	B	150	140	60	0.55	55/150	B2	4.5	210	10/1500
58/65	T8 (T26)/T12 (T38)	G13	670	LN 58.116*	508186	230, 50	B	190	180	92	0.80	55/160	B2	7.0	320	10/1200

* Energy efficiency: Ballasts without CE marking for replacements or markets outside of the EU